




Octopus Double Tank System DT

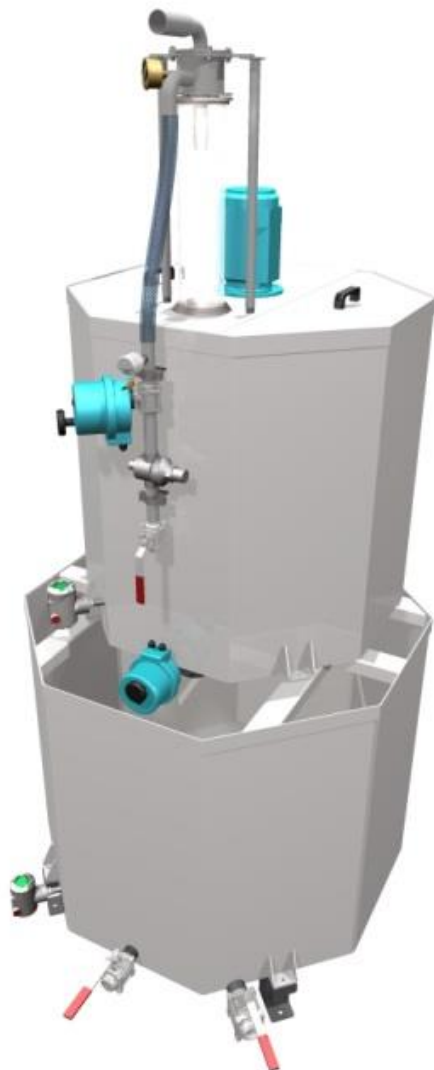


Octopus DT mixes and stores powder polymer solution through a separated two tank system. Powder polymer is transported by air which gives maximum wetting efficiency in the Polywet PPW eductor/wetter. DT is delivered with or without control panel, powder handling, dosing pumps.

- Compact, Automatic, Hygienic, CE approved
- Polywet PPW & separate tanks ensures homogenous active solution
- Octagonal tanks for optimum mixing
- Big inspection lids for easy access
- Entirely from thick stainless steel incl stainless full flow valves & pipes
- New innovative design, High performance PPW wetter/eductor
- Flexible company highly experienced in design engineering, sludge treatment. Extensive knowledge on chemicals. Complete in house laboratory.





Octopus Double Tank System DT

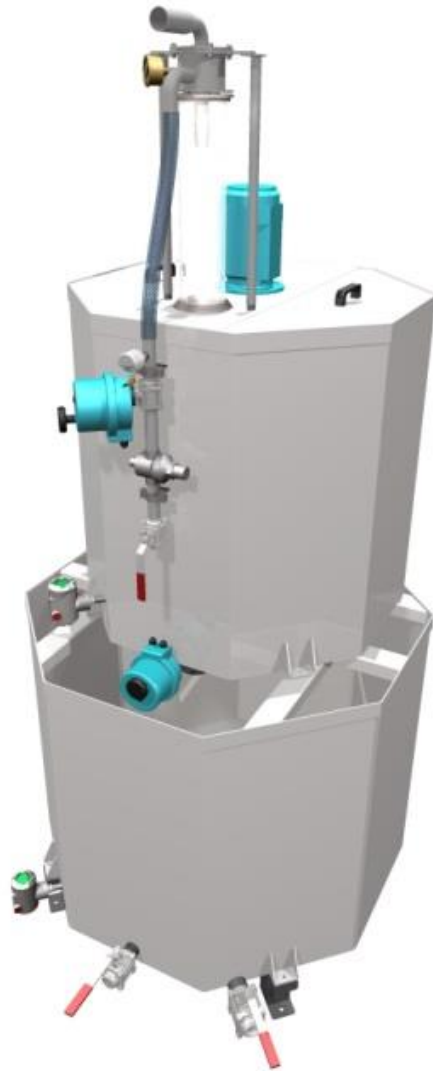

	DT 0505	DT 0709	DT 1317	DT 2030	DT 3040	DT 4050
Tank volume l	1000	1600	3000	5000	7000	9000
Capacity kg/h *	1,4	2,1	4	5,5	9,1	11,4
L	1250	1500	1750	2250	2250	2250
W	1000	1250	1500	2000	2000	2000
H	3000	3000	3250	3500	4250	4750

*Approximate data at 0,3% concentration
See technical specs and drawings at www.kicab.se

