


XP

## Spiral Press in Stainless Steel

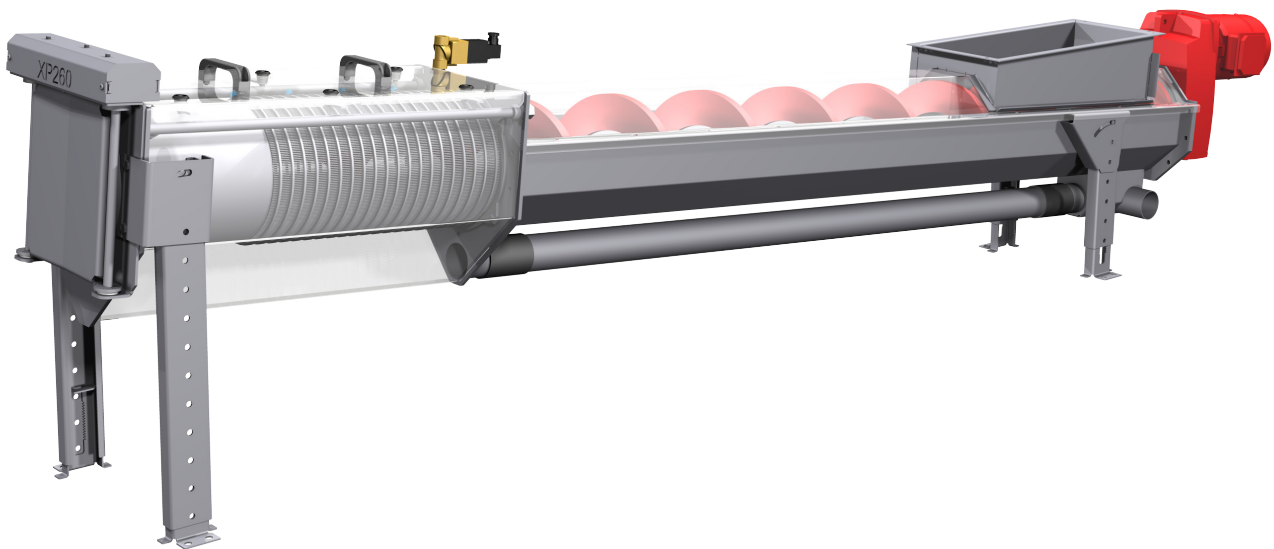

### Advantages and features

- Transportation and dewatering
- Compact and cost effective
- Robust and flexible design
- Handles wet, stringy and sticky materials
- Simple and reliable
- Very tolerant of varying flow volumes
- High finish guarantees a long life time
- Fully capsulated

# XP SPIRAL PRESS

The Meva XP Spiral Press is a reinforced XC Spiral Conveyor with a compaction and dewatering zone at the discharge end. Between the dewatering zone and the back pressure doors, there is a press zone where a plug is formed. Transportation and dewatering combined in one compact, affordable unit.


Wet solids are conveyed by a shaftless spiral into the press zone, which is a barrel shaped basket made from wedge wire. The wedge wire basket is very strong and with its large perforated area, it is optimal for dewatering.

Counter pressure is built up by a pair of outlet doors. These are controlled by gas springs optimized for maximum dewatering. As the solids are pushed into the press zone, they are held back by the outlet doors, causing a counter pressure.

As pressure increase, a plug will form at the discharge and free liquids are squeezed through the wedge wire to the drain. This continues until the plug is solid enough to bypass the outlet doors.



Since the conveying part of the press is identical with the XC Spiral Conveyor it shares the same design innovations and benefits, such as:

- Extremely low inlet height
- Bolt-on supports and inlets, no welding
- Bolt on wear liners in HDPE1000

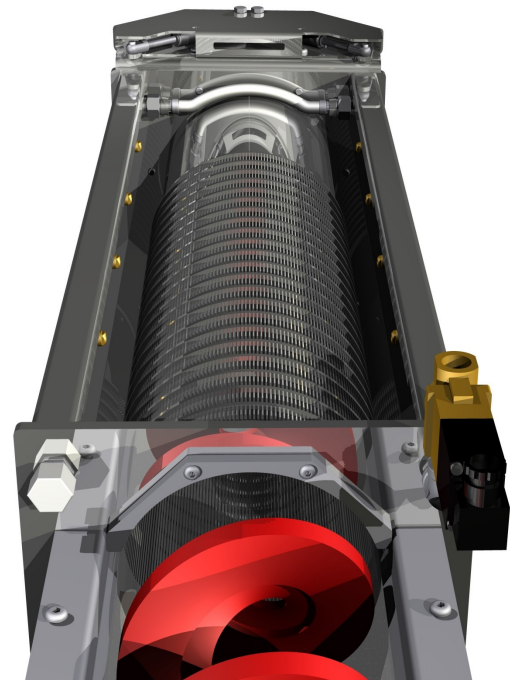


## XP Spiral Press:

- Transportation and dewatering
- Compact and cost effective
- Robust and flexible design
- Handles wet, stringy and sticky materials
- Simple and reliable
- Very tolerant of varying flow volumes
- High finish guarantees a long life time
- Fully capsulated

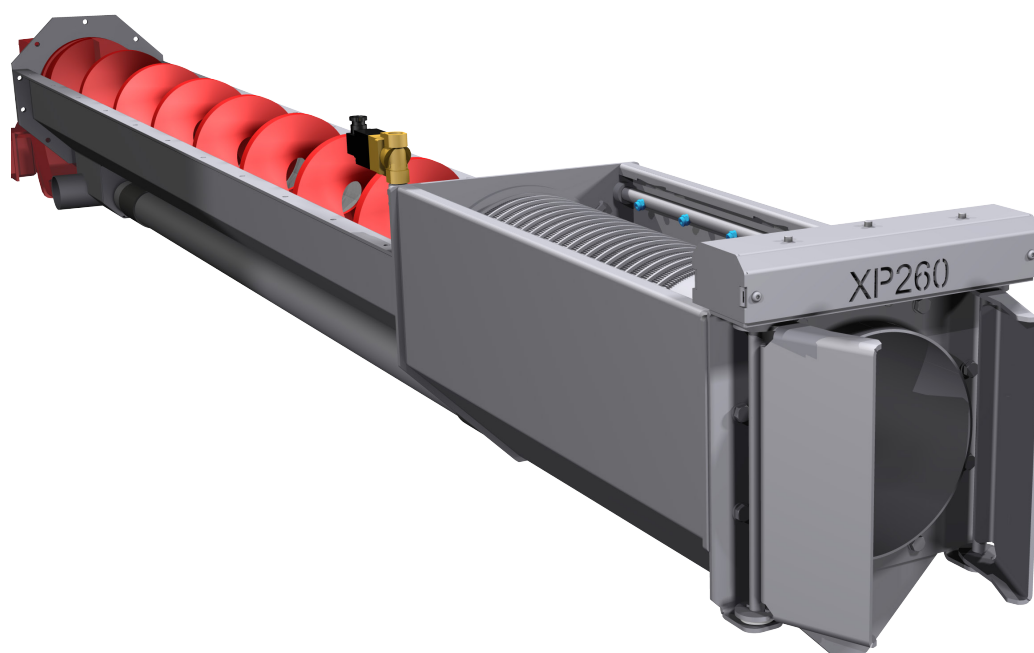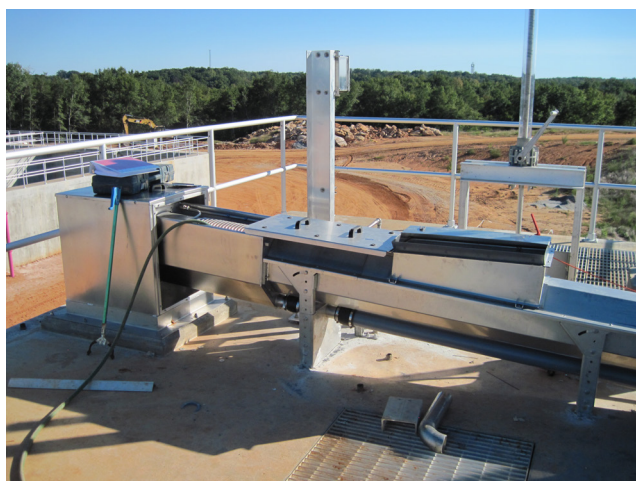

# Technical Specification

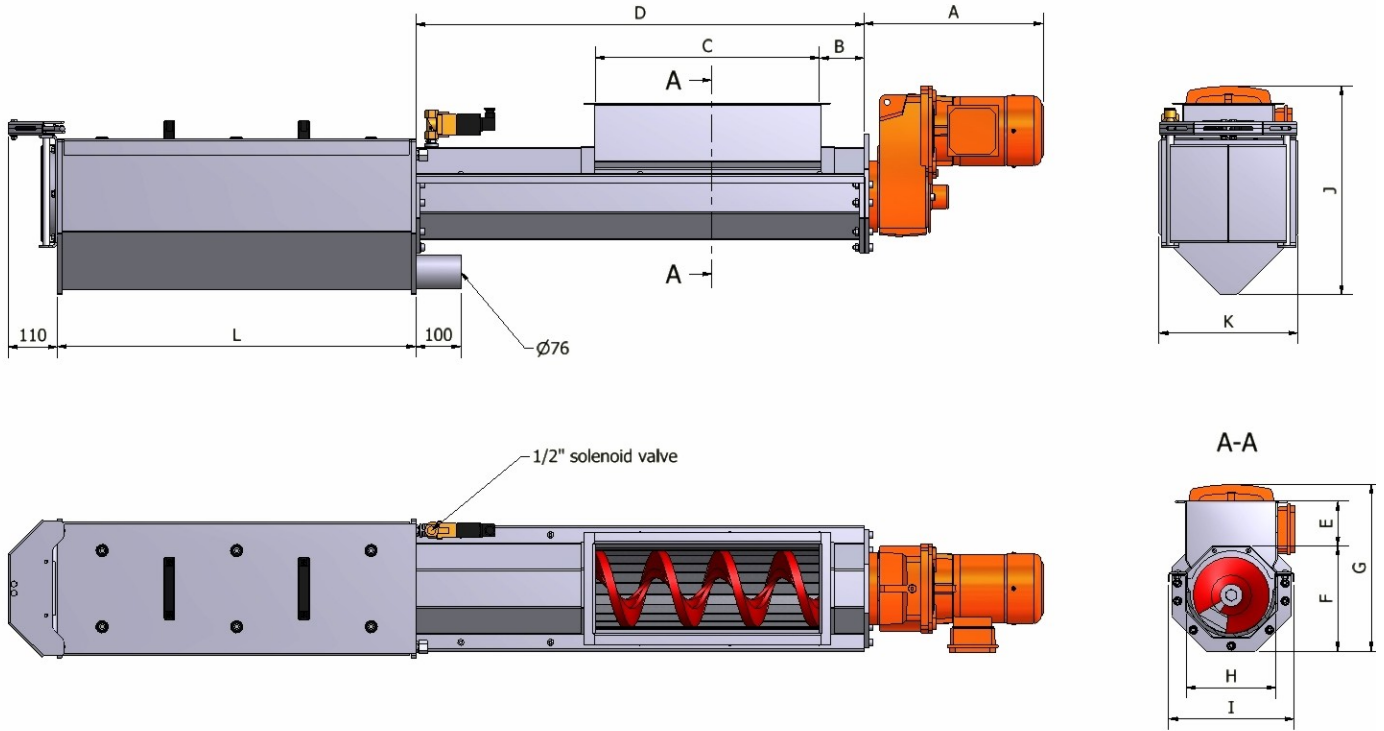

Model	A	B	C	D	E	F	G	H	I	J	K	L
X-PRESS 200	400 mm	Min 100 mm			100 mm (standard)	235 mm	375 mm	200 mm	280 mm	465 mm	310 mm	800 mm
X-PRESS 260	460 mm	Min 100 mm			100 mm (standard)	295 mm	440 mm	260 mm	340 mm	530 mm	370 mm	800 mm
X-PRESS 320	460 mm	Min 100 mm			100 mm (standard)	355 mm	470 mm	320 mm	400 mm	560 mm	430 mm	800 mm
X-PRESS 360	460 mm	Min 100 mm			100 mm (standard)	405 mm	500 mm	360 mm	460 mm	600 mm	470 mm	800 mm
X-PRESS 420	530 mm	Min 100 mm			100 mm (standard)	465 mm	600 mm	420 mm	520 mm	700 mm	430 mm	1000 mm
X-PRESS 500	530 mm	Min 100 mm			100 mm (standard)	535 mm	640 mm	500 mm	600 mm	740 mm	610 mm	1000 mm

A & G varies

