




Low pressure stainless steel foaming system with brass injector and ST/ST nozzle. Minimum water pressure inlet.

2,5 bar (max. 10 bar, 50°C). Complete with metering tips.

Is necessary to provide 100 l/min at 3-6 bar of air. Internal minimum diameter of the hose is 12,5 mm (½") The unit is ready for connexion.

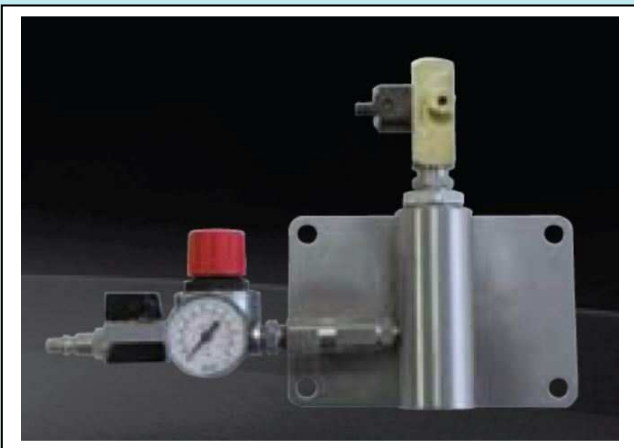

## Foam Unit, Low Pressure

Article #	707610
Weight	1,5 kg
Max. temp. water inlet	50°C
Working pressure	2,5 – 10 bar
Water inlet	½"
Water/Foam outlet	½"
Size of unit	150x200x50 mm
Material	1.4301

**PRICE 707610 (only foaming) 290,- euro**

**PRICE 707610 BY (rinsing,foaming) 530,- euro**

**PRICE 707610 CA, BY (with cover) 610,- euro**

**PRICE 707610 CA, BY, TW 910,- euro**



Cover      By-Pass      Cover+By-Pass      Double product

### On request:

Stainless steel cover, add on code :7076XX CA

By-pass, add on code : 7076XX BY

Cover and by-pass, add on code: 7076XX CA,BY

Double chemical product, add code: TW

### 707611

707610 including low pressure hose 10 meter ½" and lance.




**PRICE 707611**

**480,- euro**

### 707612

707611 including ½" ball valve gun handle.



**PRICE 707612**

**496,- euro**

### 707613

707612 including foam lance 200 mm.



**PRICE 707613**

**577,- euro**

