


Low pressure stainless steel foaming system with stainless steel injector and ST/ST nozzle. Minimum water pressure inlet. 2,5 bar (max. 10 bar, 50°C). Complete with metering tips.
 It is necessary to provide 100 l/min at 3-6 bar of air. Internal minimum diameter of the hose is 12,5 mm (½")
 The unit is ready for connections.

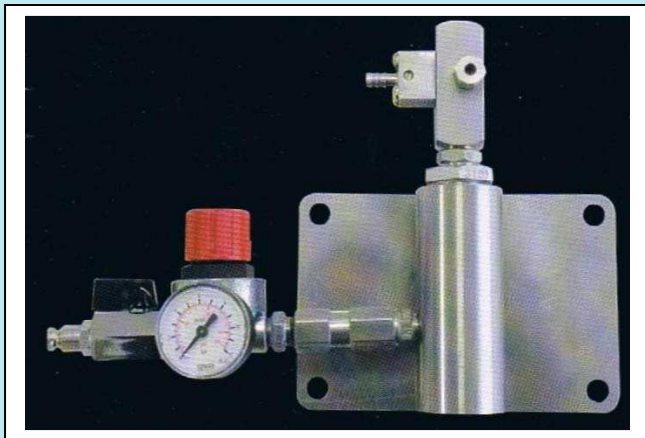

On request:

Stainless steel cover, add on code :707615 **CA**
 By-pass, add on code : 707615 **BY**
 Cover and by-pass, add on code: 707615 **CA,BY**
 Double chemical product, add code: **TW**

Foam Unit, Low Pressure

Article #	707615
Weight	1,5 kg
Max. temp. water inlet	50°C
Working pressure	2,5 – 10 bar
Water inlet	½"
Water/Foam outlet	¾"
Size of unit	150x200x50 mm
Material	1.4301

PRICE 707615 (only foaming)	440,- euro
PRICE 707615 BY (rinsing,foaming)	680,- euro
PRICE 707615 CA, BY (with cover)	760,- euro

PRICE 707615 CA, BY, TW	1060,- euro
--------------------------------	--------------------

750010H


low pressure hose 10 meter ½".



PRICE 750010H	199,- euro
----------------------	-------------------

751001

½" ball valve gun handle.



PRICE 751001	128,- euro
---------------------	-------------------

752102

foam lance 200 mm.



PRICE 752102	73,- euro
---------------------	------------------

